


# DATA SHEET

**SIQUAL<sup>...</sup>**

1730

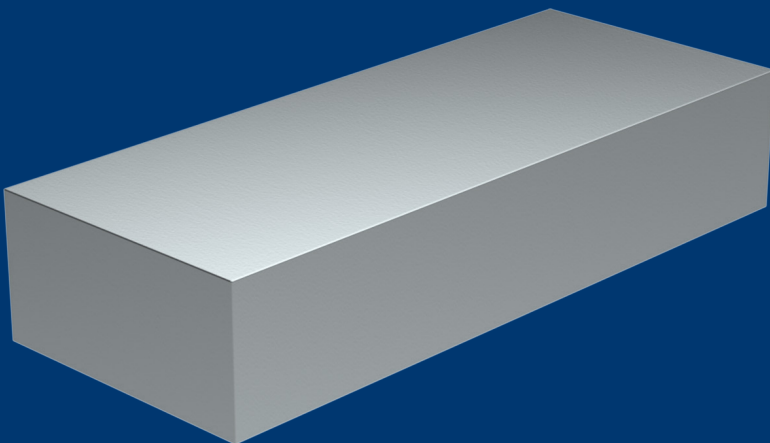

**W.NR.:** 1.1730 (EN ISO 4957)

**EN / DIN:** C45 W

**AISI:** -

## CHEMICAL COMPOSITION

C	Si	Mn	Cr	Mo	Ni
0.45	Max 0.40	0.65	Max 0.40	Max 0.10	Max 0.40

## DELIVERY CONDITION

soft annealed with a hardness of <207 HB

## PROCESS

conventional

## HEAT TREATMENT

<b>soft annealing</b> 680-710 °C	<b>cooling</b> furnace	<b>hardness (HB)</b> <207
<b>hardening</b> 820-860 °C	<b>quenching</b> oil, water	<b>hardness (HRC)</b>


## PROPERTIES

Suitable for work at higher temperatures.  
Hardening achieves a harder surface and a tough core.


## APPLICATION

For all types of base plates, tools for plastic processing, cold and hot applications. Hand tools such as knives, axes, hammers, etc.

TT

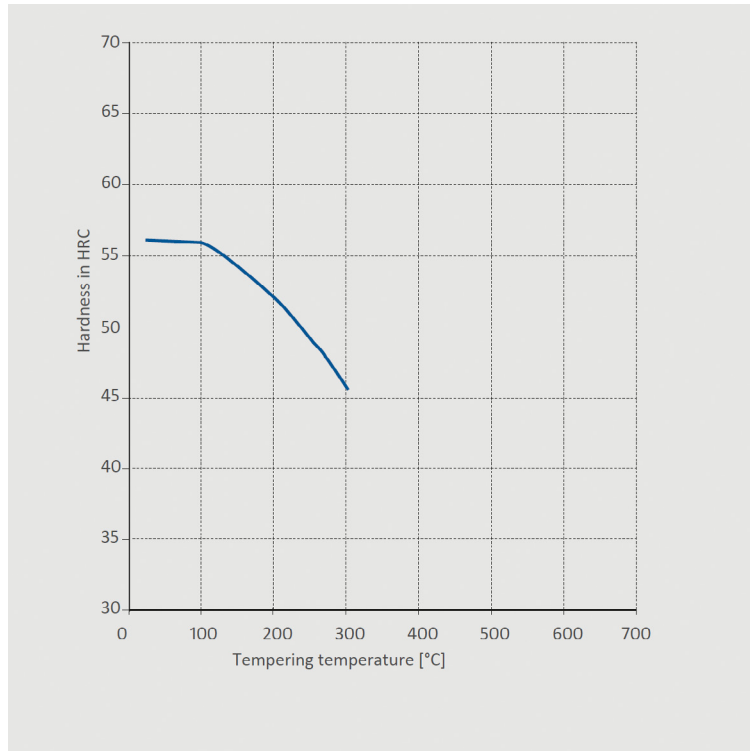

CCT

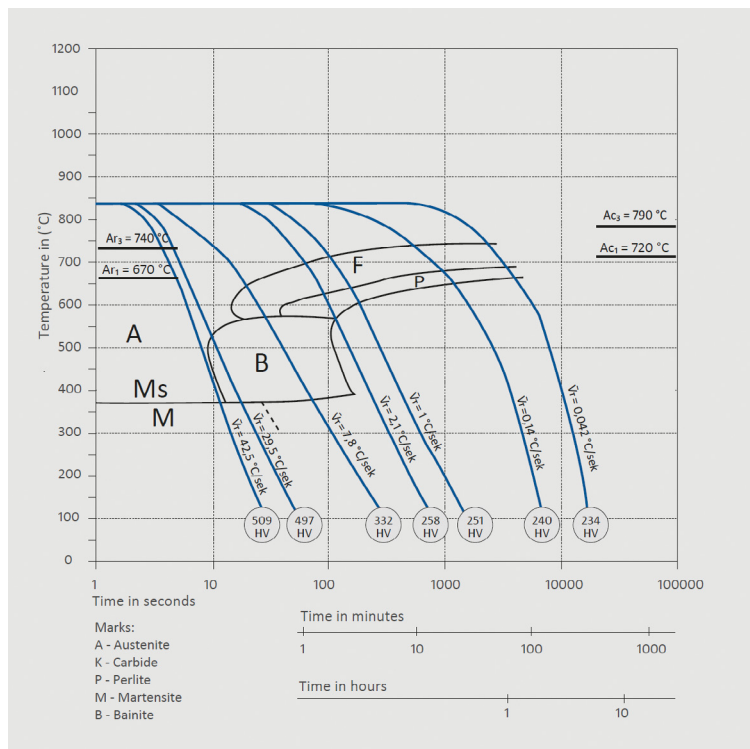

**DISCLAIMER**

The information and data presented herein are typical or average values and are not a guarantee of maximum or minimum values. Applications specifically suggested for material described herein are made solely for the purpose of illustration to enable the reader to make his own evaluation and are not intended as warranties, either express or implied, of fitness for these or other purposes. There is no representation that the recipient of this literature will receive updated editions as they become available.